Regional Agent 大中華區域代理:
A&A Consultant 香港 A&A 諮詢
www.hkaac.net / 简体: hkaac.weebly.com
@: info@hkaac.net ☎: +852-9023 4800
PO Box 143,Tung Chung, HONG KONG (香港)

KUENZEL
advanced weaving technologies
international trade & distribution
德國庫恩茨高端織造技術

Drop Wires

We can recommend the correct weight if you tell us the speed of the loom and count of the warp. We can offer up to 16g drop wires. Email us at info@hkaac.net with your required specification or ask us for a product questionnaire. Stainless steel and Nickel plated are all available upon request.

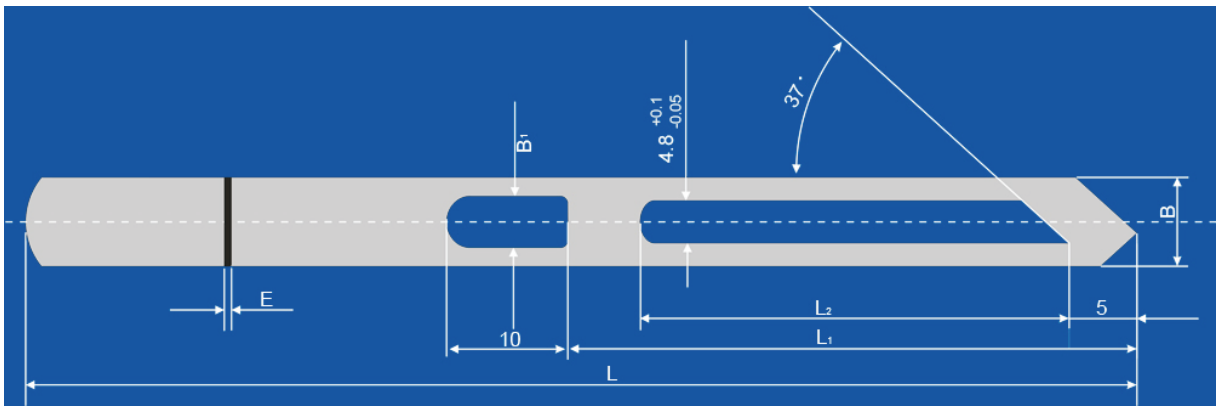

Closed, U type thread eye

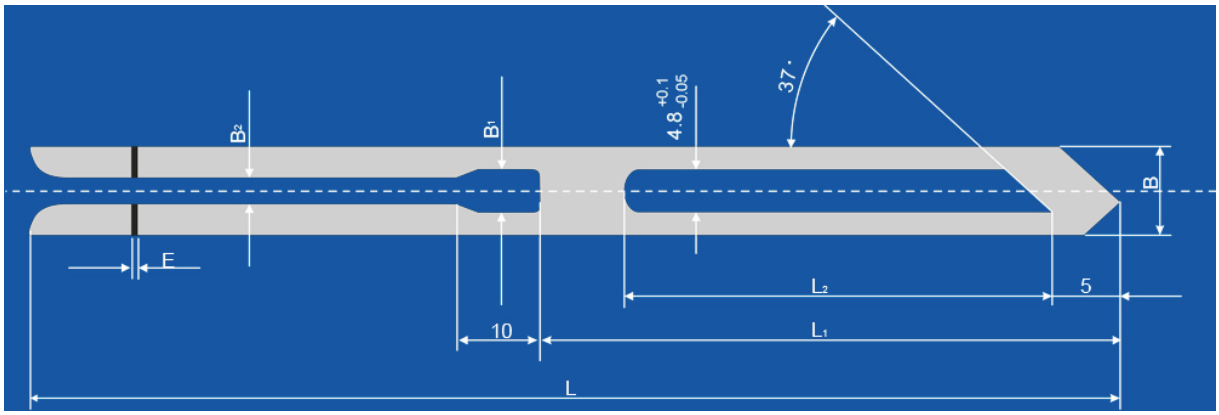

Open, U type thread eye

L = Length of drop wire
L1 = upper trough length
L2 = upper length
B = Width of drop wire

B1 = Width of thread eye
B2 = Width of lower trough
E = Thickness of drop wire
Measurement = Millimeter (mm)